



REX-FOND

Your plastics for foundation

REX-FOND 8P-Duo

TECHNICAL DATA:

Material:

Studded membrane:

HDPE

Nonwoven:

PP

Compressive strength:

approx. 250 kN/m²

Stud height:

approx. 8 mm

Stud number:

approx. 1600 studs/m²

Air-gap volume between studs:

approx. 5,3 l/m²

Water drainage capacity:

approx. 2,6 l/m x s

Temperature range:

-30°C until +80°C

Color:

black

Chemical properties:

chemicals and rotting stability

Biological properties:

resistance to mould, decay, plant roots,
drinking water neutrality

Fire behavior:

fire class E

CE-conformity:


DIN 18531 and DIN 4095

Roll sizes:

1,0 m, 2,0 m or 2,5 x 15 m /20 m

Packaging:

6 rolls per 1 euro- or disposable pallet
(1,0 m x 15 m are 12 rolls per pallet)

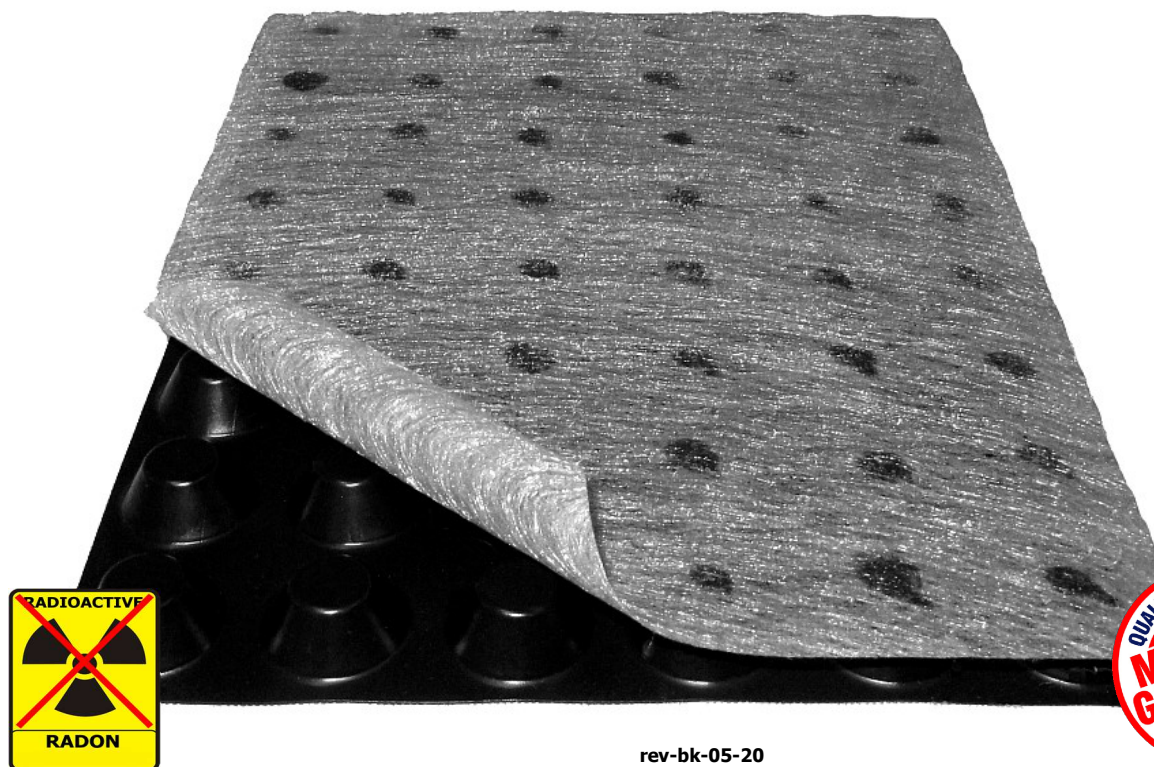

rev-bk-05-20

The manufacturer reserves the right to change product characteristics at any time without prior notice.



**REX-PLASTICS
GMBH**

REX-PLASTICS GmbH
Zum Schürmannsgraben 33 • D-47441 Moers
Tel.: +49 (0) 2841-998 998-0 • Fax: +49 (0) 2841-998 998-88
E-Mail: info@rex-plastics.com • www.rex-plastics.com