



CLiMATUBE® basic

Low-cost alternative
for cold water pipes


Product properties

- Polyethylene pipe insulation based on recycled raw materials
- Scope of application: cold water pipes
- Insulating properties: thermal conductivity of 0.049 W/mK at 40 °C mean temperature
- Protection against corrosion
- Fire class: E (normal flammability)
- Suitable for pipe temperatures from 0 °C to +100 °C



NMC (uk) Ltd.
Tafarnaubach Industrial Estate · UK - NP22 3AA Tredegar, South Wales
Phone: +44 1495 713266
Email: enquiries@nmc-uk.com
www.nmc-climatube.com

nmc

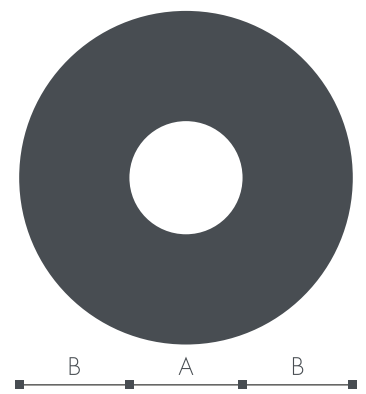

Product range

Type	A mm	B mm	Length	Packaging unit
15 - 09	15 +1/+4	9 ± 1,5	1 m	150 m
18 - 09	18 +1/+4	9 ± 1,5	1 m	125 m
22 - 09	22 +1/+4	9 ± 1,5	1 m	110 m
28 - 09	28 +1/+4	9 ± 1,5	1 m	85 m
35 - 09	35 +1/+4	9 ± 1,5	1 m	61 m
42 - 09	42 +2/+6	9 ± 1,5	1 m	44 m
15 - 13	15 +1/+4	13 ± 2	1 m	98 m
18 - 13	18 +1/+4	13 ± 2	1 m	93 m
22 - 13	22 +1/+4	13 ± 2	1 m	75 m
28 - 13	28 +1/+4	13 ± 2	1 m	62 m
35 - 13	35 +1/+4	13 ± 2	1 m	50 m
42 - 13	42 +2/+6	13 ± 2	1 m	39 m
15 - 20	15 +1/+4	20 ± 2,5	1 m	61 m
18 - 20	18 +1/+4	20 ± 2,5	1 m	55 m
22 - 20	22 +1/+4	20 ± 2,5	1 m	50 m
28 - 20	28 +1/+4	20 ± 2,5	1 m	40 m