


ECO-COMPATIBLE PRE-LAYING TREATMENT AGAINST EFFLORESCENCE

**BACK OF NATURAL STONE SURFACES, GRANITE,
MARBLE, AGGLOMERATES, TERRACOTTA AND
ABSORBENT MATERIALS**



PW10 stops contaminants (salts, tannin, ferrous substances, etc.) from rising up from the substrate to the surface of the materials, preventing the formation of marks and/or stains. Makes walls and coverings water-repellent.

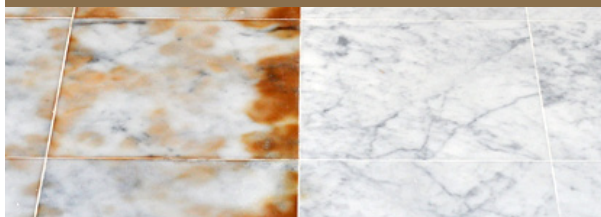

COVERAGE

APPROXIMATE COVERAGE (1 litre):

10/15 m²

"Coverage shown is for guidance purposes only and refers to single coats"

Packaging

5 litres: boxes of 4.

WARNINGS

- Keep out of reach of children.
- Do not disperse into the environment after use.
- Protect can from frost.

TEMPERATURES

Storage temperature: from 5° to 30° C.
This product must be applied to surfaces with temperature between 10°C and 30°C.

WHAT IT'S FOR

- Efflorescence blocking sealant to be applied on the back of tiles and absorbent paving slabs.
- The product stops contaminants rising up from the substrate to the material surface (salts, tannin, oxides etc.), preventing the formation of streaks and/or stains.
- Protective layer to be applied before laying to prevent rising damp.
- Specific product for natural stones, granite, marble, agglomerates, terracotta and absorbent materials.
- It has water-repellent and consolidating properties.

ADVANTAGES

- The product stops contaminants rising up from the substrate and prevents the formation of stains and streaks on the surface.
- It does not form a surface film and allows treated materials to breathe.
- In accordance with the UNI EN 1348-2009 and ASTM C482-02 R-2009 standards, it does not essentially alter the adhesion properties of the glue.
- Water-based product - VOC free.
- Permanent protection.
- Ideal for floors and all surfaces.
- When applied to natural stone, concrete and other absorbent materials after laying, it prevents the blackening of the material caused by smog, pollution, carbonatation and sulphation processes and biodeterioration.

HOW TO USE IT

No dilution required: ready to use.

Application:

PRE-LAYING TREATMENT: PROTECTION ON 5 SIDES: to block contaminating agents (stains, yellow stains, binder application errors) on the back and on the 4 sides of the material. Carefully clean the back of the tile or slab, removing any dust and residues. Check that the surface is dry and free from damp. Ensure that the surface is dry, then apply the product evenly and continuously on the back and sides of the material using a flat brush or airless pump, while trying to avoid pooling. Bond the material when completely dry, wait approximately 12 hours (temperatures between 20 °C and 40 °C) to 24 hours (temperatures between 10°C and 20°C) before bonding the material. Choose the adhesive suited to the type of installation, according to the UNI EN 12004:2012-2 standard. Store the material so that it can dry fully. After the initial wash, the surface treatment can be completed with the water-based or solvent-based protector most suited to the material's intended use.

PROTECTION ON 6 SIDES: in the presence of high humidity, it can be used to block contaminating agents (oxidation, stains, yellow stains, binder application errors) on the back and 4 sides of the material and to create a water-repellent effect on the front. Carefully clean both sides of the tile or slab, removing any dust and residues. Check that the surface is dry and free from damp. Apply one coat of **PW10** using an airless spray pump or flat brush, spreading the solution evenly on all sides of the material and avoiding any surface pooling. The product can also be applied by immersing the material in it for roughly 30 seconds. Product residues must be removed by dabbing the material with a cloth, to avoid pooling of the product on the surface. Bond the material when completely dry, wait approximately 12 hours (temperatures between 20 °C and 40 °C) to 24 hours (temperatures between 10°C and 20°C) before bonding the material. Choose the adhesive suited to the type of installation, according to the UNI EN 12004:2012-2 standard. After the initial wash, the surface treatment can be completed with the solvent-based protective agent most suited to the material's intended use.

LAYING APPLICATION - SURFACE PROTECTION: to create a water-repellent effect on the front of the tile. Make sure that the surface is dry and clean, then apply the product by impregnating the material until it is saturated, using a brush or airless pump. Dab any excess product with a clean cloth before it dries. The surface will dry after just 6 hours. The spraying system is only allowed for professional use, using the appropriate PPE, as indicated in the safety sheet.

Caution:

In case of glossy surfaces, pay special attention to the application method so as to avoid percolating the product on the front and staining the surface. Do not apply the product on the front of polished slopes.

It is advisable to verify with the manufacturer the suitable binder for the material's intended use.



- BACK SURFACE OF NATURAL STONES
- GRANITE
- MARBLE
- POLISHED MARBLE
- TERRACOTTA AND ABSORBENT MATERIALS



UNTREATED

TREATED

WHAT IT'S FOR

- Efflorescence blocking sealant to be applied on the back of tiles and absorbent paving slabs.
- The product stops contaminants rising up from the substrate to the material surface (salts, tannin, oxides etc.), preventing the formation of streaks and/or stains.
- Pre fixing protector.
- Specific product for natural stones, granite, marble, agglomerates, terracotta and absorbent materials.

ADVANTAGES

- The product stops contaminants rising up from the substrate and prevents the formation of stains and streaks on the surface.
- It does not form a surface film and allows treated materials to breathe.
- It does not alter the adhesive and grouting adhesion (UNI EN 1348-2009 e ASTM C482-02 R-2009).
- Water-based product - VOC free.
- Permanent protection.
- Ideal for floors and all surfaces.

HOW TO USE IT

No dilution required: ready to use.

Application:

Thoroughly clean the back of the tile or slab, removing dust and residues. Apply the product evenly and continuously on the back and on the side of the material using a large flat paintbrush, trying to avoid pooling.

FOR PROFESSIONAL USE ONLY:

spray the product (airless system) on vertical surfaces until they are saturated and use appropriate PPE, as indicated in the safety information sheet.

COVERAGE

With one litre:

10/15 m²

"Coverage shown is for guidance purposes only and refers to single coats"

Packaging

5-litre cans in boxes of 4.

WARNINGS

- Keep out of reach of children.
- Do not disperse into the environment after use.
- Protect can from frost.

TEMPERATURES

Storage temperature: from 5° to 30° C.

This product must be applied to surfaces with temperature between 10°C and 30°C.

COMPOSITION

Single component system with silicon organic compound base.

LABELLING

Hazard indication:

Causes serious eye irritation. Causes skin irritation.

Caution recommendations:

If medical advice is needed, have product container or label at hand.

Keep out of reach of children.

Wash hands thoroughly after handling. Wear protective gloves / eye protection / face protection. If skin irritation occurs: Get medical advice / attention.



TECHNICAL FEATURES

Appearance: liquid

Colour: colourless

Odour: pungent

Density: 1.014 kg/l

pH: 13

Flammability: >60°C

This information is the result of our most up-to-date technical know-how and is based on ongoing laboratory research and testing. Nevertheless, for reasons beyond our control, any suggestions always require appropriate analysis, testing and monitoring. Fila shall not accept any responsibility for improper use of its products.